

FSMB-0.5-6000

500K~6GHz

Features:

- * Broad Band
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar


Electrical

Frequency:	500K~6GHz
Nominal Insertion Loss:	6dB typ.
Phase Shift:	180° typ.
Amplitude Balance:	±1.2dB max.
Phase Balance:	±10° max.
Common Mode Rejection:	20dB min.
Excess Insertion Loss:	2.5dB max.
Isolation:	8dB typ.
VSWR:	1.5 typ.
Impedance:	50Ω
Input Power:	1W max.
Risetime/Falltime:	17ps ²

Mechanical

Size:	7.55*8.35*4.6mm
	0.297*0.329*0.181in

Outline Drawings

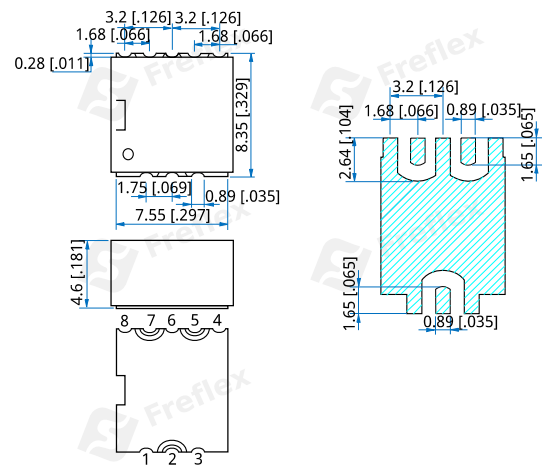

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FSMB-0.5-6000

Customization is available upon request.