

FSM-0-18000-2-4-1

2*SPDT, DC~18GHz

Features:

- * Low Insertion Loss
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Description

This switch matrix consists of 2 independent SPDT coaxial switches, SPDT can achieve 1 input and 2 output (2 input and 1 output).

Electrical

Frequency:	DC~18GHz
Voltage:	+80~270V AC
Impedance:	50Ω

Frequency (GHz)	Insertion Loss (dB)	VSWR	Isolation (dB)
DC~6	0.2	1.2	70
6~12	0.3	1.3	70
12~18	0.4	1.4	60

Mechanical


Size ^{*1} :	220*180*63
	8.661*7.087*2.48in
RF Connectors:	SMA Female
Power Supply Connectors:	Three-phase plugs
Control Interface:	LAN
Indicator Lights:	On the front panel

[1] Exclude connectors.

Environmental

Operating Temperature: -25~+65°C

Outline Drawings

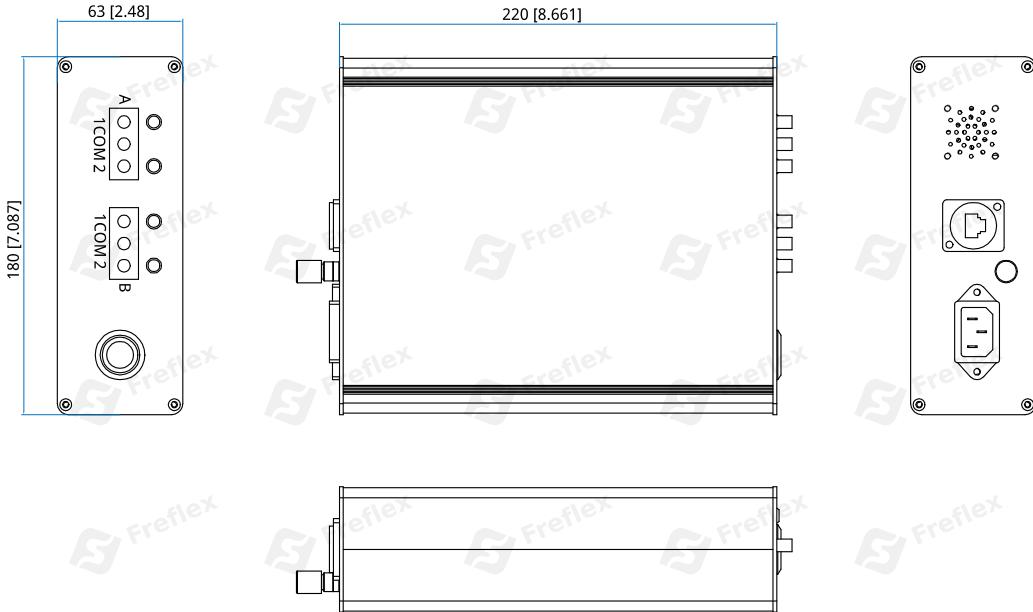

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FSM-0-18000-2-4-1

Customization is available upon request.