

FWB-10 WR-10

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	73.8~110GHz
VSWR:	1.15 max.

Mechanical

Interface:	WR-10 (BJ900)
Flange:	UG387/UM (FUGP900)
Material:	Copper
Coating:	Gold Plated

How To Order

FWB-10-U-W-X-Y-Z

U: Angle:

90 - 90°

W: H plane: H, E plane: E.

X: Material

Y: Flange type

Z: Serial number if diffent sizes

Bending Side:

H - H plane (Outline A)

E - E plane (Outline B)

Material naming rules:

C - Copper (Outline A, B)

Flange naming rules:

12 - UG-387/UM (Outline A, B)

Serial number naming rules:


01 - (Outline A, B)

Examples:

To order a waveguide Bends, WR-10, 90°, H plane, Copper, UG-387/UM, 30*30mm, specify FWB-10-90-H-C-12-01.

Customization is available upon request.

Outline Drawings

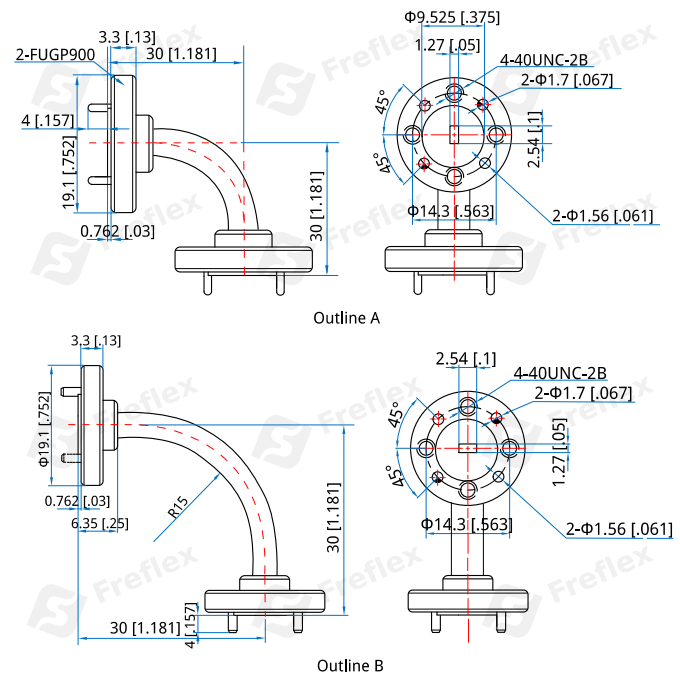

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]