

FWB-15 WR-15

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	49.8~75.8GHz
VSWR:	1.15 max.

Mechanical

Interface:	WR-15 (BJ620)
Flange:	UG385/U (FUGP620)
Material:	Copper
Inner Finishing:	Gold Plated

How To Order

FWB-15-U-W-X-Y-Z

U: Angle:

90 - 90°

W: H plane: H, E plane: E.

X: Material

Y: Flange type

Z: Serial number if different sizes

Bending Side:

H - H plane (Outline A)

E - E plane (Outline B, C)

Material naming rules:

C - Copper (Outline A, B, C)

Flange naming rules:

6 - UG385/U (Outline A, B, C)

Serial number naming rules:

01 - (Outline A: 20*20mm, C: 20*20mm)

02 - (Outline A: 30*30mm, B: 30*30mm)

03 - (Outline C: 25*25mm)

04 - (Outline C: 30*30mm)




05 - (Outline C: 35*35mm)

Examples:

To order a waveguide Bend, WR-15, 90°, H plane, Copper, FUGP620, 20*20mm, specify FWB-15-90-H-C-6-01.

Customization is available upon request.

Outline Drawings

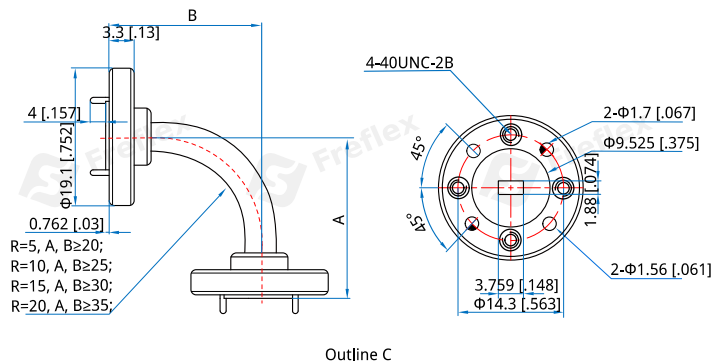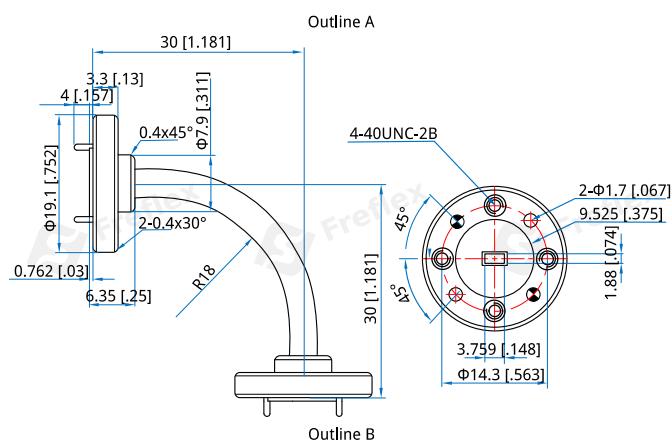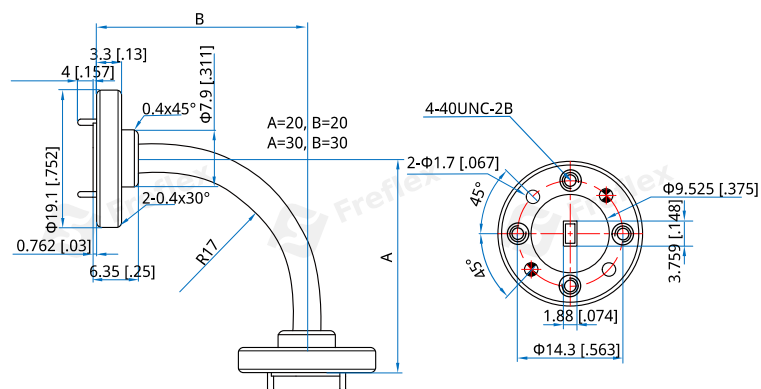

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]