

FWB-187 WR-187

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	3.94~5.99GHz
VSWR:	1.15 max.
Insertion Loss:	0.15dB max.

Mechanical

Interface:	WR-187 (BJ48)
Flange:	FDM48
Material:	Aluminum
Coating:	Gray paint
Finish:	Conductive oxidation

How To Order

FWB-187-U-W-X-Y-Z

U: Angle:

90 - 90°

W: H plane: H, E plane: E.

X: Material

Y: Flange type

Z: Serial number if different sizes

Bending Side:

H - H plane (Outline A)

E - E plane (Outline B)

Material naming rules:

A - Aluminum (Outline A, B)

Flange naming rules:

4 - FDM (Outline A, B)

Serial number naming rules:


01 - (Outline A, B)

Examples:

To order a waveguide bends, WR-187, 90°, H plane, Aluminum, FDM48, 300*300mm, specify FWB-187-90-H-A-4-01.

Customization is available upon request.

Outline Drawings

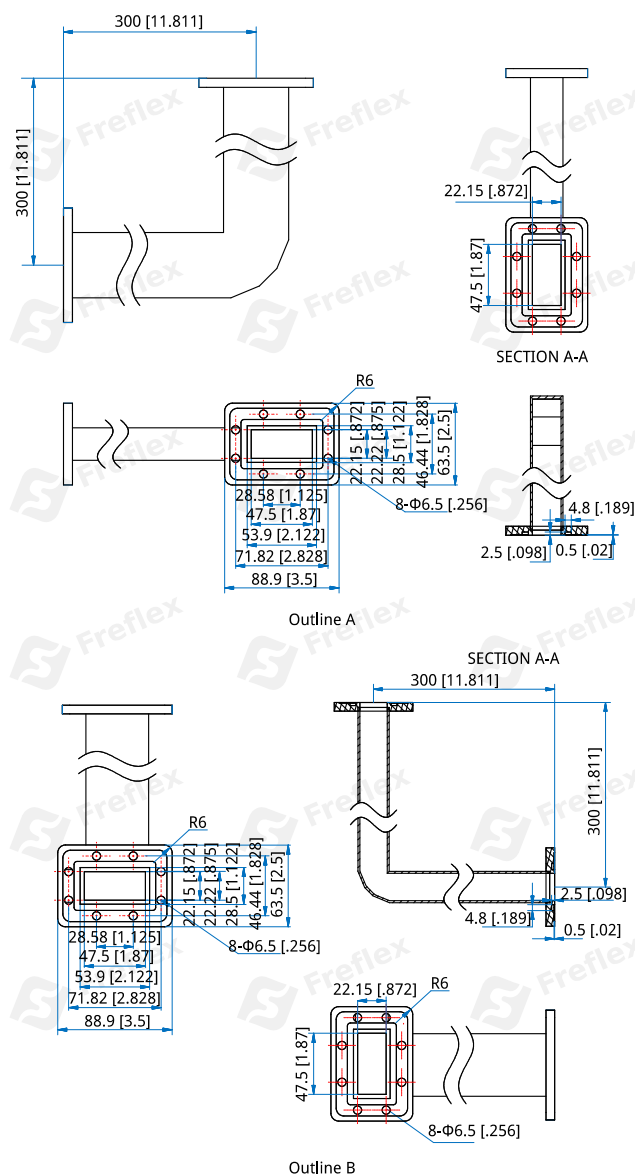

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]