

FWB-D650-D750

WRD-650, WRD-750

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	8~18GHz
VSWR:	1.2 max.
Insertion Loss:	0.4dB max.

Mechanical

Interface:	WRD-650, WRD-750
Flange:	FPWRD650, FPWRD750
Material:	Aluminum
Coating:	Gray paint
Finish:	Silver plating

How To Order

FWB-D650-D750-U-W-X-Y-Z

U: Angle:

90 - 90° (Outline A)

W: H plane: H, E plane: E.

X: Material

Y: Flange type

Z: Serial number if different sizes

Bending Side:

E - E plane (Outline A)

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:

8 - FPWRD (Outline A)

Serial number naming rules:


01 - (Outline A)

Examples:

To order a waveguide bends, WRD-650, WRD-750, 90°, E plane, Aluminum, FPWRD650, FPWRD750, 100*100mm, specify FWB-D650-D750-90-E-A-8-01.

Customization is available upon request.

Outline Drawings

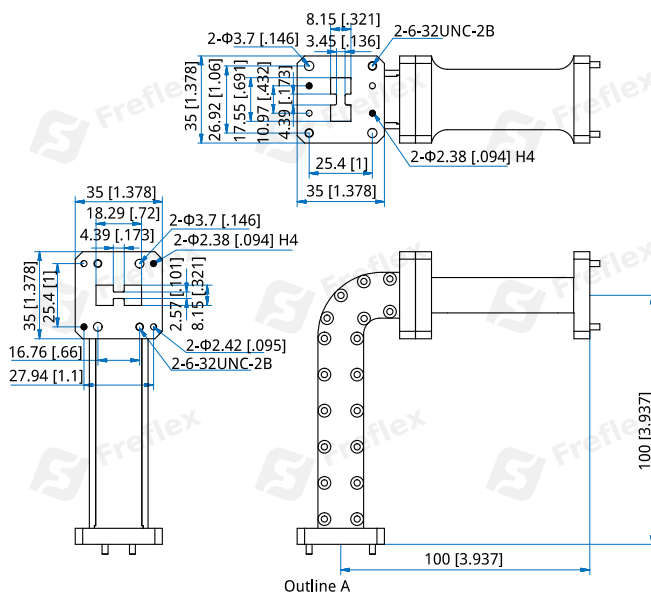

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]