

FWC-14500-22000-K3

14.5~22GHz

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Electrical

Frequency:	14.5~22GHz
Insertion Loss:	0.4dB max.
Isolation:	20dB min.
VSWR:	1.2 max.
Average Power:	300W

Mechanical

Interface:	WR-51 (BJ180)
Flange:	FBP180
Material:	Aluminium
Finish:	Conductive oxidation

Outline Drawings

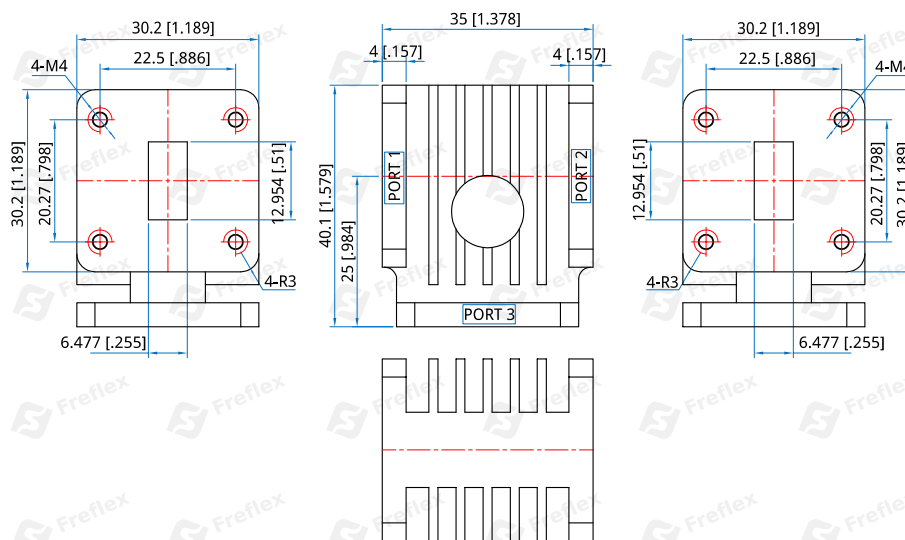

Outline A

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FWC-14500-22000-K3-Y-Z

Y : Material

Z : Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

1 - FBP (Outline A)

Examples:

To order a Waveguide Circulator, 14.5~22GHz, 300W, Aluminium, FBP180, specify FWC-14500-22000-K3-A-1.

Customization is available upon request.