

FWFA22-K1

WR-22, 100W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

Frequency:	32.9~50GHz
VSWR:	1.2 max.
Attenuation:	30±1.5, 40±1.5dB
Average Power:	100W

Mechanical

Interface:	WR-22 (BJ400)
Flange:	FUGP400
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Gray paint

Outline Drawings

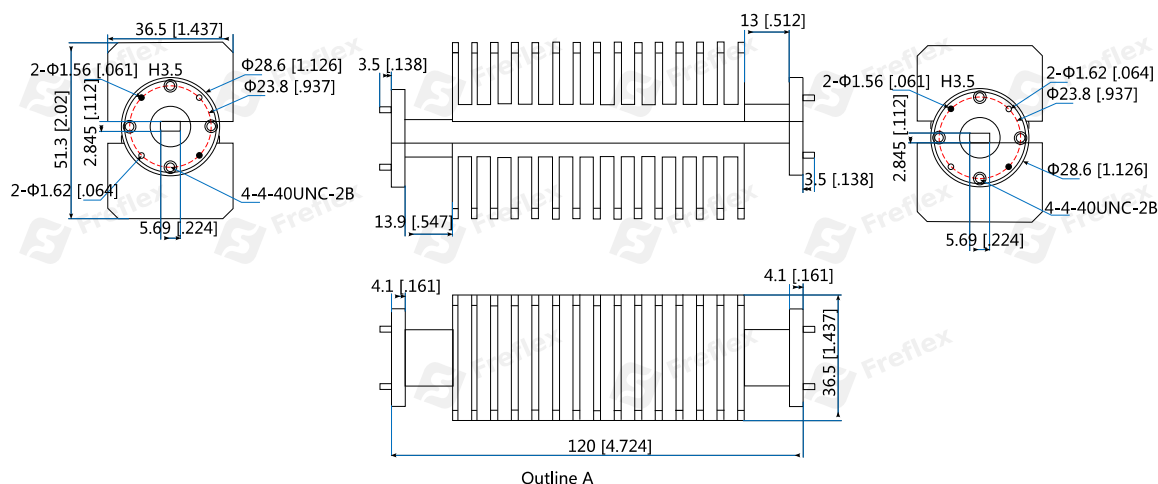

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FWFA22-K1-X-Y-Z

X: Attenuation in dB (30, 40 - Outline A)

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

5 - FUGP400 (Outline A)

Examples:

To order a Waveguide Fixed Attenuator, 32.9~50GHz, 30dB, Aluminium, FUGP400, specify FWFA22-K1-30-A-5.

Customization is available upon request.