

FWFA28-K5

WR-28, 500W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

Frequency:	26.5–40GHz
VSWR:	1.2 max.
Attenuation:	40dB
Average Power:	500W

Mechanical

Interface:	WR-28 (BJ320)
Flange:	FBP320
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Gray paint

Outline Drawings

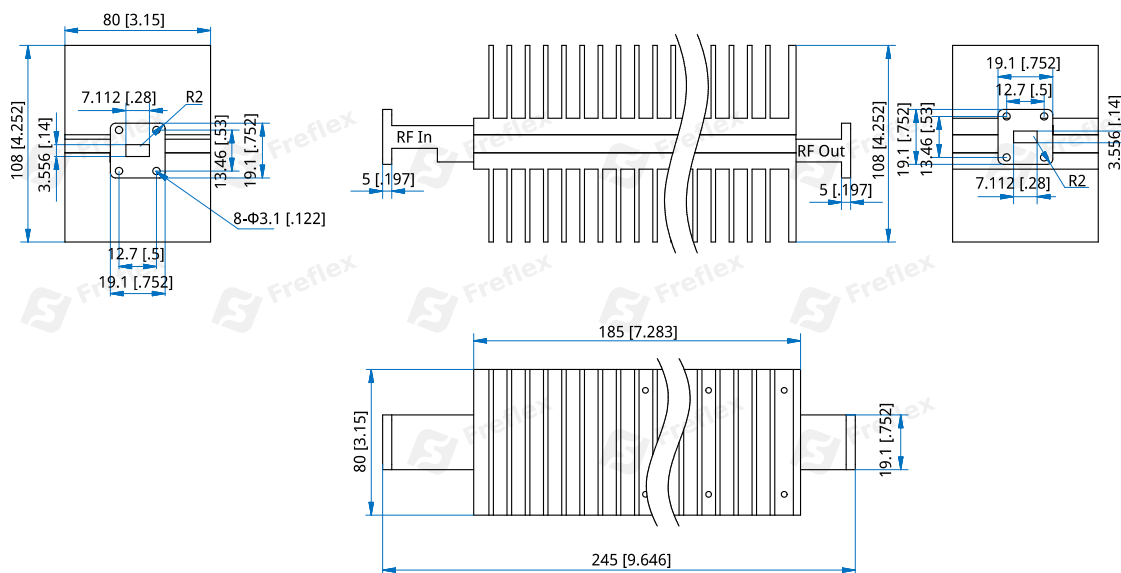

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FWFA28-K5-X-Y-Z

X: Attenuation in dB

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium

Flange naming rules:

1 - FBP

Examples:

To order a Waveguide Fixed Attenuator, 26.5–40GHz, 40dB, Aluminium, FBP320, specify FWFA28-K5-40-A-1.

Customization is available upon request.