

FWFA90-25

WR-90, 25W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

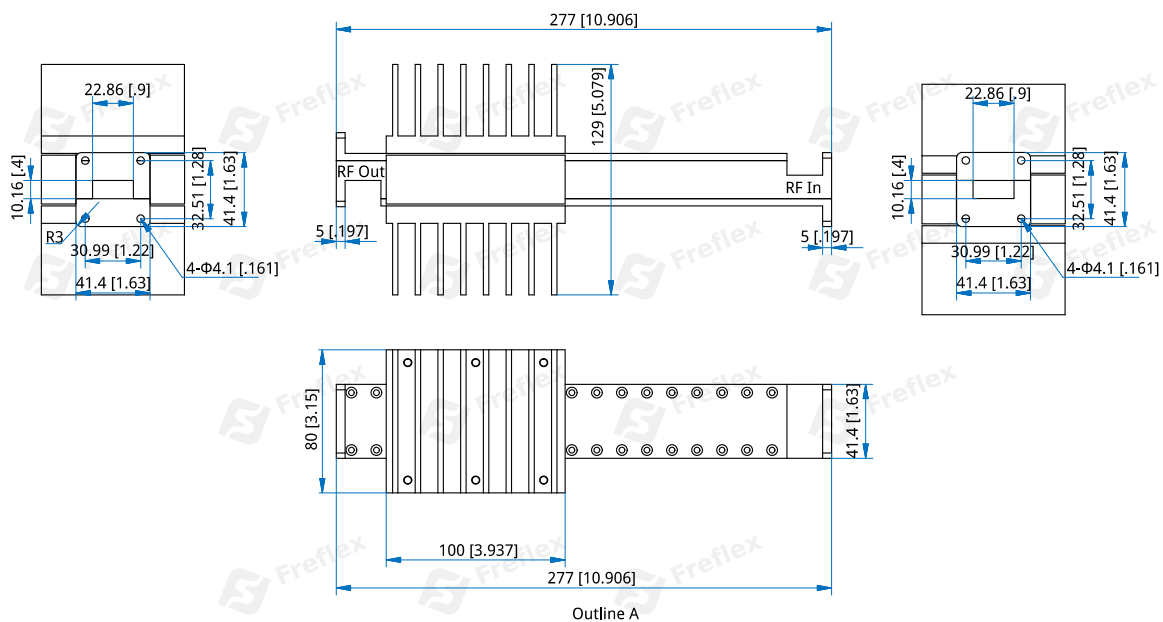
- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	8.2~12.4GHz
VSWR:	1.2 max.
Attenuation:	40±1dB
Average Power:	25W
Peak Power:	110KW

Mechanical

Connectors:	WR-90 (BJ100)
Flange:	FBP100
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Gray plated

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FWFA90-25-X-Y-Z

X: Attenuation in dB (40 - Outline A)

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

1 - FBP100 (Outline A)

Examples:

To order a Waveguide Fixed Attenuator, 8.2~12.4GHz, 40dB, Aluminium, FBP100, specify FWFA90-25-40-A-1.

Customization is available upon request.