

FWFAD180-K2

WRD-180, 200W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	18~40GHz
VSWR:	1.2 max.
Attenuation:	30±1.5dB
Average Power:	200W


Mechanical

Interface:	WRD-180
Flange:	FPWRD180
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Gray paint

Environmental

Operating Temperature:	-40~+125°C
------------------------	------------

Outline Drawings

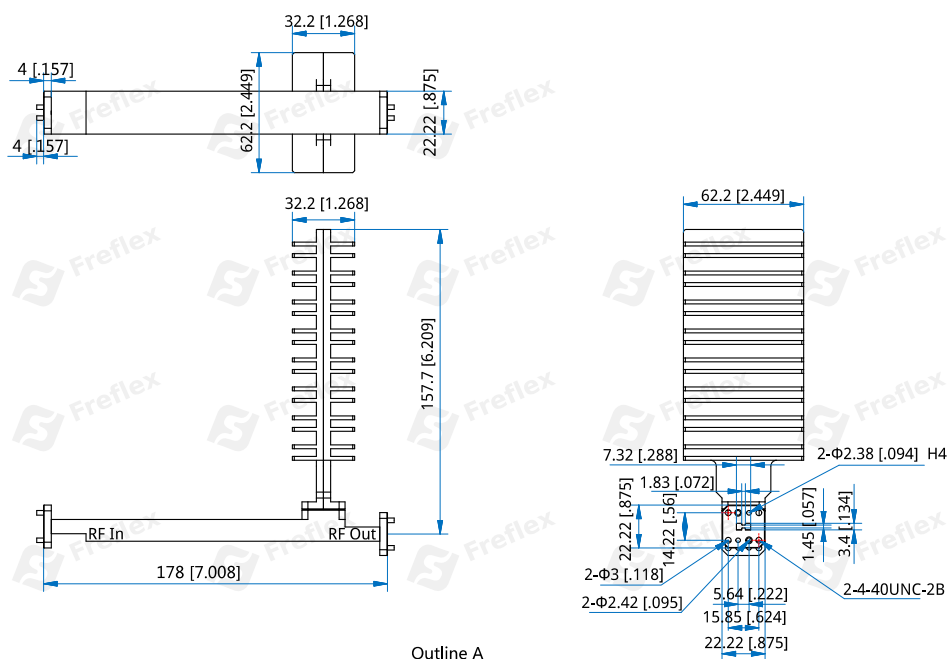

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FWFAD180-K2-X-Y-Z

X: Attenuation in dB (30 - Outline A)

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

8 - FPWRD (Outline A)

Examples:

To order a Waveguide Fixed Attenuator, 18~40GHz, 30dB, Aluminium, FPWRD180, specify FWFAD180-K2-30-A-8.

Customization is available upon request.