

## FWI-2200-3300-K5

### Broadband & High Isolation

**Features:**

- \* Broadband
- \* High Isolation
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Radar
- \* Laboratory Test

### Electrical

Frequency:	2.2~3.3GHz
Insertion Loss:	0.3dB max.
Isolation:	23dB min.
VSWR:	1.25 max.
Average Power:	500W

### Mechanical


Size:	449.05*250*144mm 17.679*9.843*5.669in
Interface:	WR-340 (BJ26)
Flange:	FDP26
Material:	Aluminium
Finish:	Conductive oxidation
Mounting:	10-Φ6.5mm through-hole

### How To Order

**FWI-2200-3300-K5**

Customization is available upon request.

### Outline Drawings

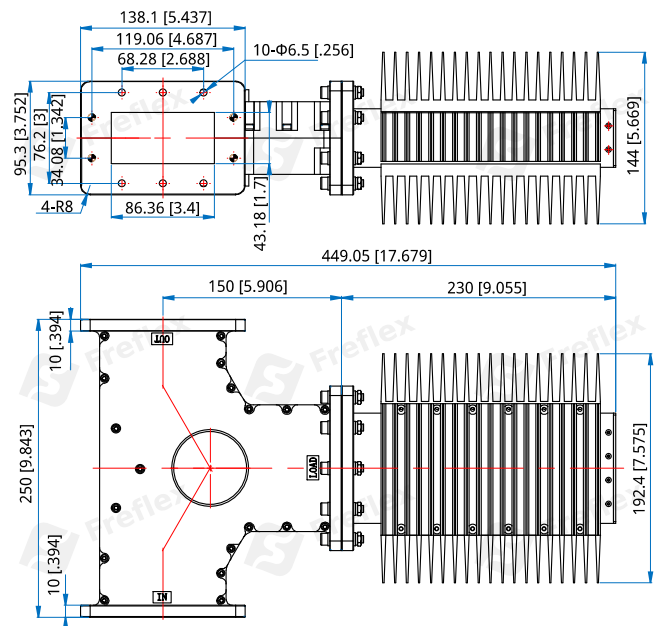

Unit: mm [inch]

Tolerance: ±0.5mm [±0.02in]