

FWI-8000-12000-K2

Broadband & High Isolation

Features:
 * Broadband
 * High Isolation
 * Low Insertion Loss

Applications:
 * Wireless
 * Radar
 * Laboratory Test

Electrical

Frequency: 8~12GHz
 Insertion Loss: 0.35dB max.
 Isolation: 18dB min.
 VSWR: 1.25 max.
 Average Power: 200W
 Peak Power*1: 1KW

[1] 20% duty cycle (Adjustment with the whole machine).

Mechanical


Size: 160*55*41.4mm
 6.299*2.165*1.63in
 Interface: WR-90 (BJ100)
 Flange: FBP100
 Material: Aluminium
 Cooling: Air cooling
 Finish: Conductive oxidation

How To Order

FWI-8000-12000-K2

Customization is available upon request.

Outline Drawings

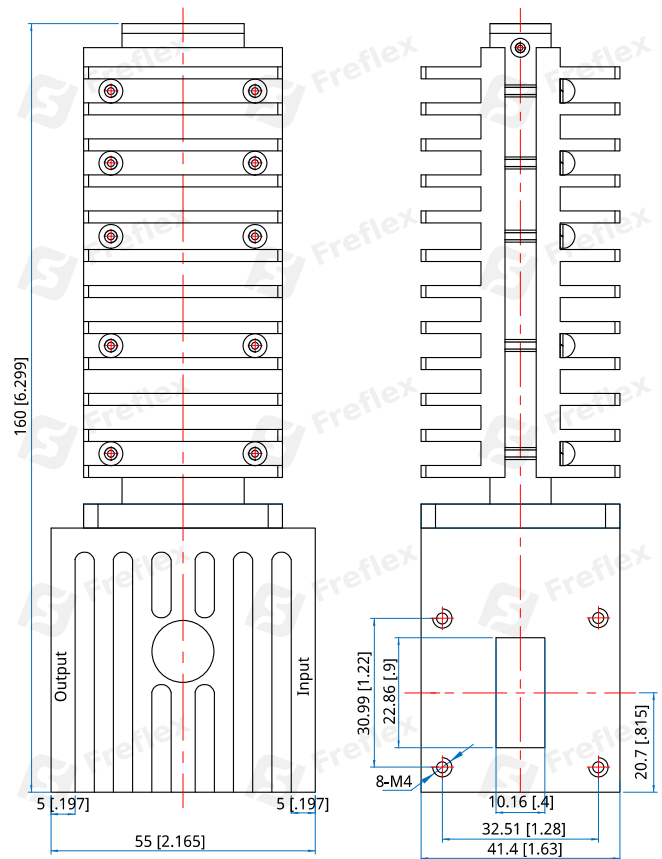

Unit: mm [inch]

Tolerance: ±0.5mm [±0.02in]