

FWMPS-229-360

WR-229, 360°

Features:

- * Low Insertion Loss
- * High Power
- * High Reliable

Applications:

- * Laboratory Test
- * Transmitter
- * Instrumentation
- * Wireless

Electrical

Frequency:	3.22~4.9GHz
VSWR:	1.5 max.
Phase Adjustment:	0~360°
Impedance:	50Ω

Mechanical

Interface:	WR-229 (BJ40)
Flange:	FDP40
Material:	Aluminium
Finish:	Conductive oxidation

How To Order

FWMPS-229-360-X-Y-Z

X: Display

Y: Material

Z: Flange type

Display naming rules:

A - Analog (Outline A)

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:


2 - FDP (Outline A)

Examples:

To order a waveguide manual phase shifter, 3.22~4.9GHz, WR-229, 0~360°, Analog, Aluminium, FDP40, specify FWMPS-229-360-A-A-2.

Customization is available upon request.

Outline Drawings

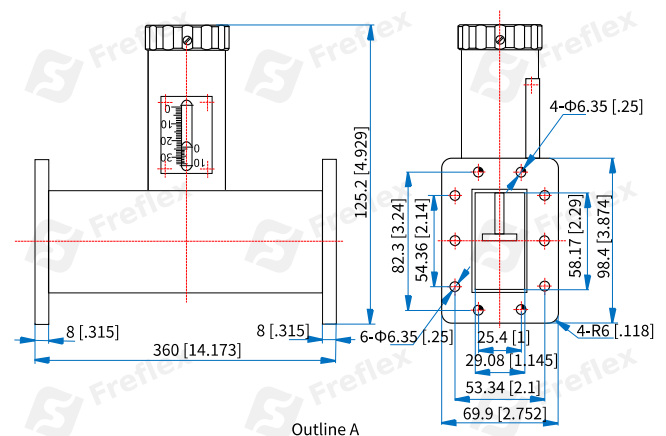

Unit: mm [in]

Tolerance: ±0.8mm [±0.032in]