

FWMPS-90-360

WR-90, 360°

Features:

- * Low Insertion Loss
- * High Power
- * High Reliable

Applications:

- * Laboratory Test
- * Transmitter
- * Instrumentation
- * Wireless

Electrical

Frequency:	8.2~12.4GHz
Impedance:	50Ω
VSWR:	1.25 max.
Phase Adjustment:	0~360°

Mechanical

Interface:	WR-90 (BJ100)
Flange:	FBP100
Material:	Silver plated copper
Coating:	Sea gray

Environmental

Operating Temperature:	-45~+75°C
------------------------	-----------

How To Order

FWMPS-90-360-X-Y-Z

X: Display

Y: Material

Z: Flange type

Display naming rules:

A - Analog (Outline A)

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


1 - FBP (Outline A)

Examples:

To order a Waveguide Manual Phase Shifter, 8.2~12.4GHz, WR-90, 0~360°, Analog, Copper, FBP100, specify FWMPS-90-360-A-C-1.

Customization is available upon request.

Outline Drawings

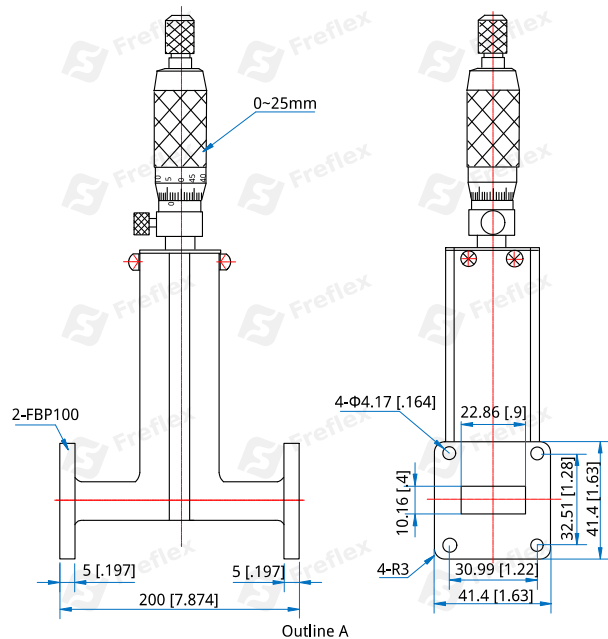

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

This product is non-linear coarse tuning.