

FWST-430-3

WR-430, 3 Screws

Features:

- * Precise Impedance Matching
- * Mechanical Adjustability

Applications:

- * Wireless
- * Laboratory Test
- * Radar

Electrical

Frequency:	2.025~2.12GHz
VSWR:	1.05~2 max. (Adjustable)
Pressure:	0.02MPa
Power:	10KW

Mechanical

Number of Screws:	3
Waveguide Size:	WR-430 (BJ22)
Flange:	FDP22, FDM22
Material:	Copper
Coating:	Sea gray

How To Order

FWST-430-3-X-Y

X: Material

Y: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:

2 - FDP


4 - FDM

Examples:

To order a waveguide screw tuners, WR-430, 3 Screws, Copper, FDP220, FDM220, specify FWST-430-3-C-2-4.

Customization is available upon request.

Outline Drawings

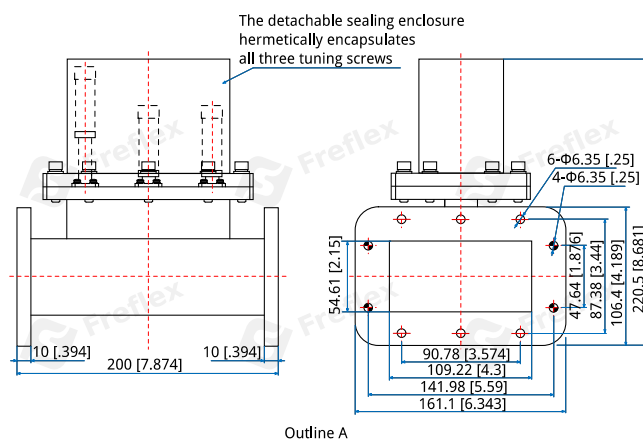

Unit: mm [in]

Tolerance: $\pm 2\text{mm}$ [$\pm 0.079\text{in}$]