

FWSS-340

WR-340

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2.17~3.3GHz
VSWR:	1.05 max.
Insertion Loss:	0.06dB max.

Mechanical

Length:	250mm 9.843in
Interface:	WR-340 (BJ26)
Flange:	FDM26
Material:	Aluminum
Finish:	Conductive oxidation
Coating:	Gray paint

How To Order

FWSS-340-X-Y-Z

X: Length in mm.

Y: Material

Z: Flange type

Length in mm:

250-250mm (Outline A)

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:


4 - FDM (Outline A)

Examples:

To order a waveguide straight section, WR-340, 250mm, Aluminium, FDM26, specify FWSS-340-250-A-4.

Customization is available upon request.

Outline Drawings

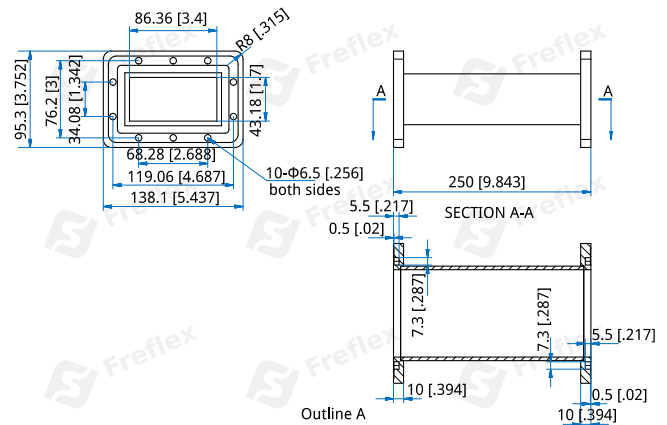

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]