

## FWCA-229-TF-R-2-A

WR-229 to TNC Female, Right angle

### Features:

- \* Low VSWR

### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency: 3.22~4.9GHz  
 VSWR: 1.2 max.

### Mechanical


RF Connectors: TNC Female  
 Waveguide Size: WR-229  
 Flange: FDP40  
 Material: Copper

### How To Order

[FWCA-229-TF-R-2-A](#)

Customization is available upon request.

### Outline Drawings

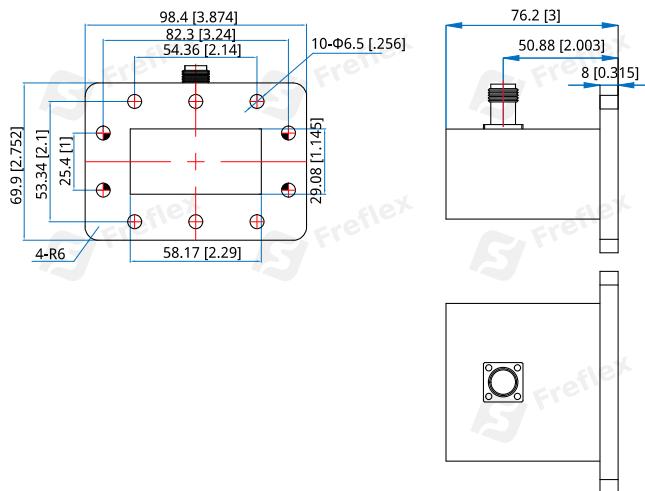

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]