

FWCA-D110-S

WRD-110 to SMA

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: 11~26.5GHz
VSWR: 1.25 max.

Mechanical

Coax Connectors:	SMA
Waveguide Size:	WRD-110
Flange:	FPWRD110
Material:	Aluminium

How To Order

FWCA-D110-X-Y-Z

X : Connector type.

Y : Configuration type.

Z : Flange type if applicable.

Connector naming rules:

S - SMA Male (Outline A)

SF - SMA Female (Outline A)

Configuration naming rules:

E - End launch

R - Right angle (Outline A)

Flange naming rules:

8 - FPWRD (Outline A)

Examples:


To order a waveguide to coax adapter, WR-D110 to SMA female, right angle, FPWRD, specify FWCA-D110-SF-R-8.

Customization is available upon request.

Environmental

Operating Temperature: -70~+165°C

Outline Drawings

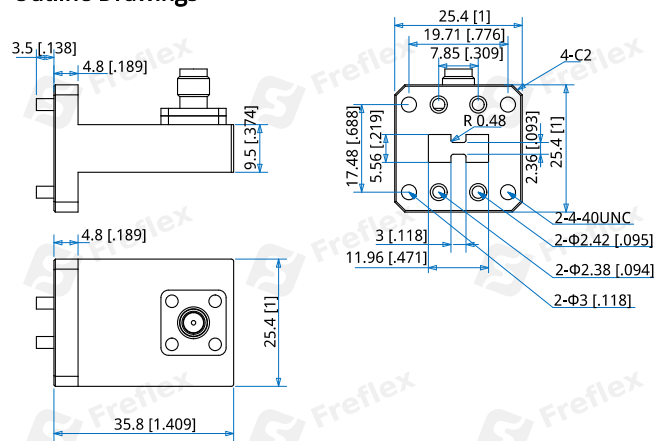

Outline A

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]