

FTW-D750 WRD-750

Features:

- * Low VSWR
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

Frequency: 7.5~18GHz
VSWR: 1.25 max.

Mechanical

Size: 152.4*35*35mm
6*1.378*1.378in
Waveguide Size: WRD-750
Flange: FPWRD750
Material: Copper
Finish: Silver plating
Coating: Sea gray

Outline Drawings

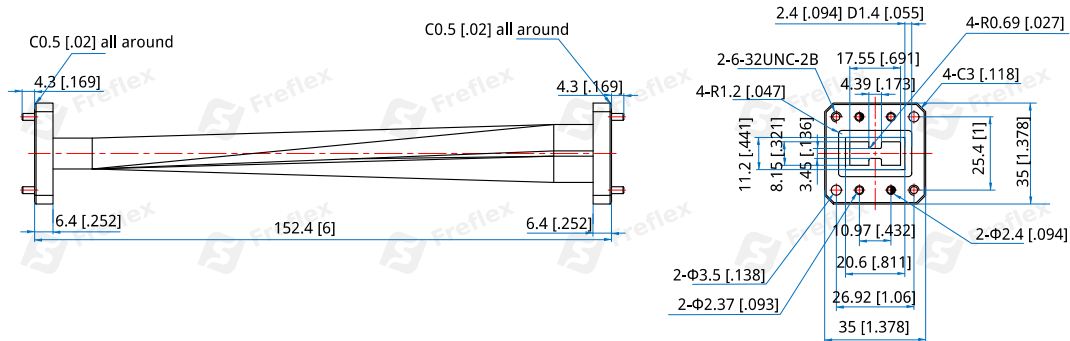

Outline A

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

FTW-D750-X-Y-Z

X: Length in mm.

Y: Material

Z: Flange type

Length in mm:

152.4 - 152.4mm (Outline A)

Material naming rules:

C - Copper (Outline A)

Flange naming rules:

8 - FPWRD (Outline A)

Examples:

To order a Waveguide Twist, WRD-750, 152.4mm, Copper, FPWRD750, specify FTW-D750-152.4-C-8.

Customization is available upon request.