

FPD4-6000-26500-30-S

4-Way, 6~26.5GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	6~26.5GHz
Insertion Loss:	1.9dB max.
VSWR:	1.6 max.
Isolation:	18dB min.
Amplitude Balance:	±0.4dB max.
Phase Balance:	±4° max.
Impedance:	50Ω
Power @SUM Port:	30W as divider 2W as combiner

Mechanical


Size ^{*1} :	38.1*51.7*12.7mm 1.5*2.035*0.5in
Connectors:	SMA Female
Mounting:	2-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

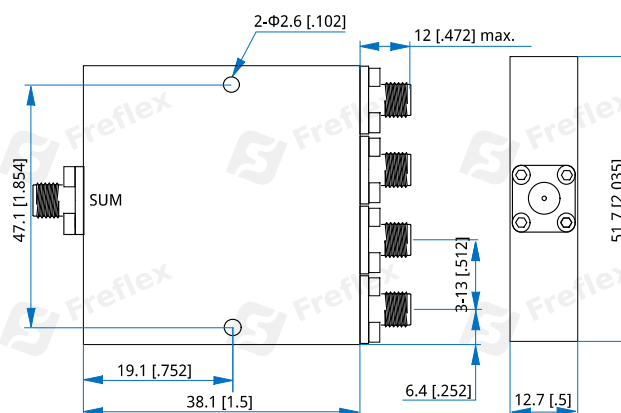

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FPD4-6000-26500-30-S

Customization is available upon request.